

TRIUMPH

Street Triple 765RS (HD04) my 20/22

product	code	description
Steering damper kit	SD.T115K	SDK (front)
Steering damper kit	SD.T115R	SDR (front)
Monoshock (C-R-L-P)	MT132.02K	M46K std
Monoshock (C-R-L-HP)	MT132.02ID	M46K+ID hydraulic spring preload
Monoshock (CH-CL-R-L-HP)	MT132.02R	M46R Racing (ID preload unit)
Fork kit (fork type Showa BPF)	FT134RK-BP1	FRK Hydraulic kit (step1)
Fork kit (fork type Showa BPF)	FT134RK-BP2	FRK Hydraulic kit (step2)
Fork kit (C-R-P) (fork Showa type BPF)	F25T134R	F25R "quad valve" Hydraulic Cartridge kit
Fork kit (C-R-P) (fork Showa type BPF)	F25T134SA	F25SA "sealed" Hydraulic Cartridge kit



on demand Dark Series




High speed
Low speed
Compression
adjustment



Compression
adjustment



Hydraulic
spring
preload unit



Rebound
adjustment



Length
adjustment



CH = HighSpeed Compression adj. / regolazione Compresse AV
CL = LowSpeed Compression adj. / regolazione Compressione BV
C = Compression adjustment / regolazione Compressione
R = Rebound adjustment / regolazione Estensione
L = Length adjustment / regolazione Interasse
P = spring Preload by ring / Precarico molla standard
HP = hydraulic spring Preload adj. / Precarico molla idraulico



TRIUMPH

Street Triple 765RS (HD04) my 20/22

F25SA fork kit sealed asymmetric system



Rebound unit
(range: 38 clicks)



Preload unit
(range: 15 mm)

Compression unit
(range: 38 clicks)



on demand
the technopolymer fork cap tools


T21 fork cap tool 36 (8 sides)



T22 fork cap tool 28 (6 sides)



FRK-BP1

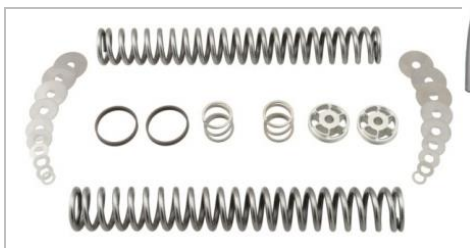

FRK-BP2

F25R fork kit quad-valve asymmetric system



Compression unit
(range: 38 clicks)



Preload unit
(range: 15 mm)

Rebound unit
(range: 38 clicks)

